
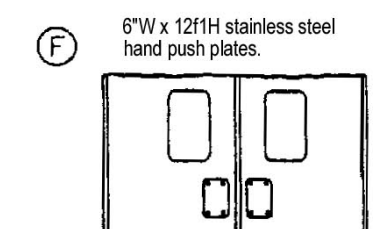

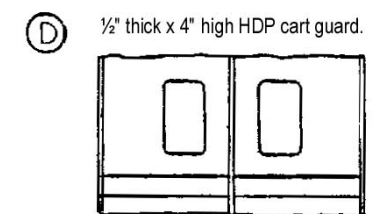

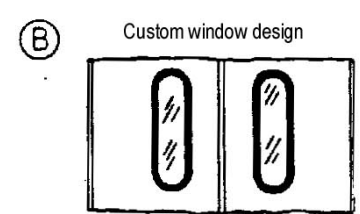


1. Galvanized steel top hinge assembly. Consists of ; top pin rollers, roller pin, & roller pin clip.
 2. Galvanized steel top clamp
 3. Nuts & bolts to secure bearing plate to top clamp .
 4. Galvanized steel bearing plate.
 5. Anodized aluminum hinge covers.
 6. Hinge cover screws.
 7. Galvanized steel bottom door clamp.
 8. Galvanized steel bottom hinge assembly (Bottom pin).
 9. .032 anodized aluminum satin finish upper panels.
 10. 9"W X 14"H clear safety acrylic
 11. Black rubber window molding.
 12. 48" high base plates 18 ga. stainless steel both sides.
 13. 3/4" thick plywood core.
 14. Galvanized steel trim.
- MODEL SS-3G**
15. Full Perimeter Replacable Gasketing.



ALL DRAWINGS ARE THE PROPERTY OF SUPER SEAL MFG LTD INFORMATION HEREIN SUBJECT TO CHANGE WITHOUT NOTICE.

CUSTOMER _____
PROJECT _____
QUANTITY _____
APPROVED BY _____ DATE _____

SOLID WOOD CORE DOOR	
SERIES 1000	DWG. SS-3/ SS-3G