



1. TOP HINGE ASSEMBLY
2. BOTTOM HINGE ASSEMBLY
3. ALUMINUM COVER PANEL
4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW
5. 18 ga. STEEL KICK PLATES (SEE OPTIONS)
6. 3/4" THICK EXTERIOR GRADE PLYWOOD OUTER CORE
7. 1/2" INSULATING FOAM INNER CORE
8. GALVANIZED OR STAINLESS STEEL TRIM (TO MATCH KICK PLATE)
& REPLACEABLE RUBBER GASKETING

*** RECOMMENDED FRAMING REQUIREMENTS:
1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED
TO A SOLID FOUNDATION.

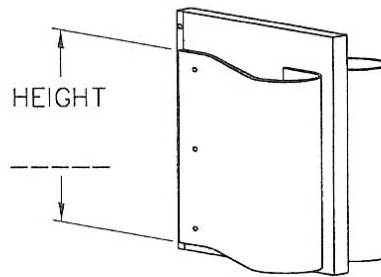

SPRING BUMPER

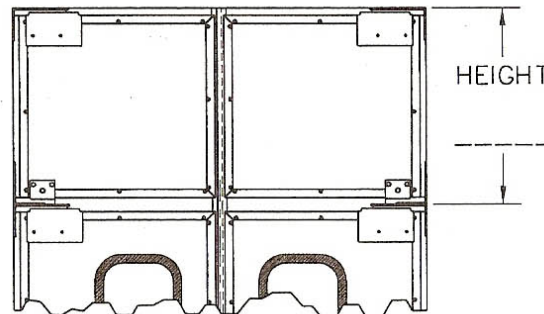

DOUBLE DUTCH

DOOR OPENING:

-----W-----H

QUANTITY:-----

DOUBLE

SINGLE

LEFT

RIGHT

OPTIONS (CHECK BOX IF APPLICABLE)

5/16" THICK HDP SPRING BUMPERS
SELECT HEIGHT

12"

21"

42"

CUSTOM WINDOW DESIGN

RECTANGULAR/SQUARE

-----W-----H

ROUND - DIAMETER:-----

9" JAMB GUARDS

KICK PLATES
SELECT HEIGHT

24"

36"

48"

FULL HEIGHT

METAL SELECTION (FRONT/BACK)

STAINLESS STEEL/STAINLESS STEEL

STAINLESS STEEL/GALV. STEEL

GALV. STEEL/STAINLESS STEEL

GALV. STEEL/GALV. STEEL

CART GUARD

CHAIN LOCKING COLLAR

DOUBLE DUTCH

S.S. QUOTE REF. #-----

CUSTOMER-----

APPROVED BY:-----

P/O No.:-----

DATE:-----



SERIES 1000 - MODEL SS7
GASKETED & INSULATED WOOD CORE DOOR

DATE: REV. NOV-23-04	SCALE: N.T.S.
DRAWN: OC	DWG NO: LSS7
APPROVED: AX	PART NO: N/A